

Configurations

CCTV Model	CCTV PTZ	CCTV PTZ-4	Both Models
Nominal Service Voltages	24V AC/DC RS232	RS232/422/485	Coax Protection
Surge Current Ratings 10/1000 μ s	150A	190A	140A
Maximum Voltage	28V AC 40V DC	24V DC	12V


Operating Temperature -40 ° C to +65 ° C

Dimensions: 3.25" H X 3.17" W X 1.3" D
8.26 cm X 8.05 cm X 3.3 cm

Response Time (Max.) <5 Nanoseconds

Features

- Protects video camera and associated controls in one compact unit
- Pan-tilt-zoom protection
- CCTV PTZ protects coax, power, and 2 wire data
- CCTV PTZ-4 protects coax, and 4 wire data
- Non-degrading silicon suppressors

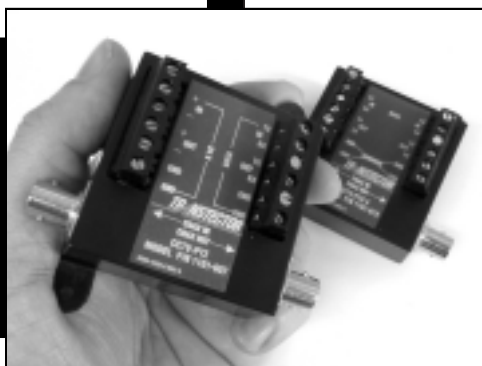

Actual Applications

Closed circuit television systems with pan tilt
zoom controls



ISO9001 Certified

Warranty

Five (5) year unconditional warranty
Ten (10) year manufacturer warranty